

# RAYZON SOLAR

## L'LIOS

540 Wp - 555 Wp

MONO PERC 10BB  
MONOFACIAL

30 Years Warranty for  
Linear Performance\*



12 Years Product Warranty on  
Materials and Workmanship\*



### PRODUCT | CERTIFICATES

IS 14286, IEC: 61215, 61730, 62804, 61853, 61701, 62716 •  
Quality Management System : ISO 9001:2015 •  
Environment Management System : ISO 14001: 2015 •  
Occupational Health and Safety : ISO 45001:2018 •



### PRODUCT | KEY FEATURES

- Anti-reflective (AR) Coated Glass for Enhanced Power
- Excellent Module Efficiency with reflective white backsheet
- Rayzon Solar Module ensures Long-term reliability
- Positive Power Tolerance with Current Binning to Prevent Mismatch Losses

# TECHNICAL DATA



ELECTRICAL PERFORMANCE [Note: Power tolerance: 0 ~ +4.99 W. Power measurement uncertainty: < ±3%. ]

PERFORMANCE UNDER STANDARD TEST CONDITIONS (STC)	RS540WC	RS545WC	RS550WC	RS555WC
(irradiance of 1000 W/m², spectrum AM 1.5G and cell temperature of 25°C.)				
Nominal Maximum Power (Pmax)	540 W	545 W	550 W	555 W
Optimum Operating Voltage (Vmp)	41.86 V	42.01 V	42.14 V	42.28 V
Optimum Operating Current (Imp)	12.91 A	12.98 A	13.06 A	13.13 A
Open Circuit Voltage (Voc)	49.78 V	49.91 V	50.06 V	50.20 V
Short Circuit Current (Isc)	13.53 A	13.59 A	13.65 A	13.71 A
Module Efficiency	20.94 %	21.13 %	21.32 %	21.51 %
Fill Factor	80.24 %	80.39 %	80.54 %	80.66 %


## PERFORMANCE UNDER NOCT

(NOCT = 45.25°C irradiance of 800 W/m², ambient temperature of 20°C and Wind speed 1 m/s)

Nominal Maximum Power (Pmax)	400 W	403 W	407 W	411 W
Optimum Operating Voltage (Vmp)	38.54 V	38.68 V	38.80 V	38.93 V
Optimum Operating Current (Imp)	10.37 A	10.43 A	10.49 A	10.55 A
Open Circuit Voltage (Voc)	46.82 V	46.94 V	47.08 V	47.21 V
Short Circuit Current (Isc)	10.96 A	11.01 A	11.06 A	11.11 A

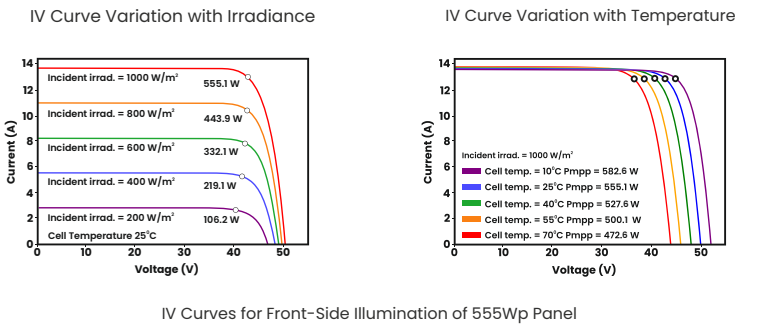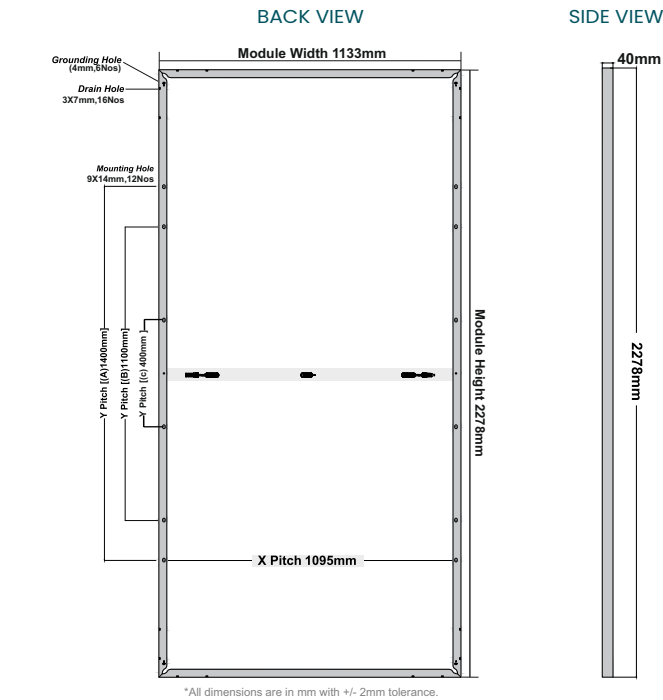

## LINEAR PERFORMANCE WARRANTY

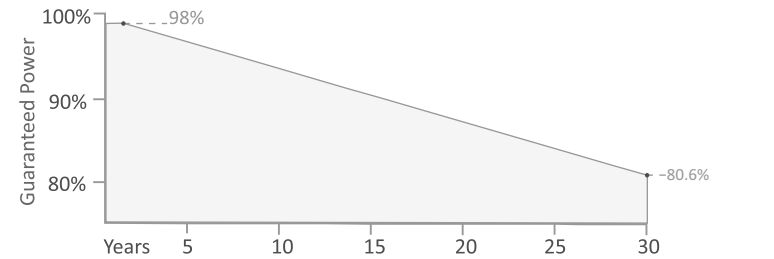

## MECHANICAL SPECIFICATIONS

Dimensions	2278(L) x 1133(W) x 40(T) in mm
Weight(kg)	28.6
Cell type / No Of Cell	144 Half-cut Mono PERC Solar cells
Frame	Anodized Aluminum Alloy (6005, Temper T6, silver colour)
Front Cover	ARC coated Low Iron Tempered Glass (3.2 mm thick)
Encapsulate	Ethylene Vinly Acetate (EVA) Sheet - PID resistant and UV resistant
Back Cover	Corona treated PVDF Fluoro-polymer Backsheet (white colour)
Junction Box	25A Split Junction Box (3 nos. with individual Bypass Diode) - Weatherproof (IP68)
Bypass Diode	40 A, 45 V, 200 °C max. junction temperature
Cable	4 sq. mm,300 mm length(Customized cable length available on request)
Connectors	MC4 compatible (MC4 original available on request)
Application Class Rating	Class A
Safety Class Rating	Class II
Mechanical Load Test	5400 Pa-Front; 2400 Pa-Back (as per IEC & UL)
Mounting Holes Pitch (Y)-mm	[A] 1400, [B] 1100 [C] 400
Mounting Holes Pitch (X)-mm	1095

Caution: Please read safety and installation instructions before using the product. \*Warranty: Linear performance warranty for 30 years, with degradation up to 2% in 1st year and 0.6 %/year from year 2 to year 30. Please read Rayzon warranty documents thoroughly. Disclaimer: Specifications included in the datasheet are subject to change without prior notice owing to continuous innovation in the Product Development and R&D Activities. RAYZON SOLAR LTD. reserves the right to make any adjustment to the information described here. Dataset contained in this specification do not form a representative of a single module data. @T&C Apply.

## MAXIMUM OPERATING CONDITIONS

Operating Temperature:	-40°C to +85°C
Maximum System Voltage:	1500V
Maximum Series Fuse Rating:	25 A

## TEMPERATURE COEFFICIENTS

Current α (Isc) :	0.0297% /C
Voltage β (Voc) :	-0.2470% /C
Power γ (Pmax) :	-0.3303% /C

STACKING STANDARD	20FT	40FT
No. of Modules per Container:	135	540
No. of Pallets per Container:	05	20
No. of Modules per Pallet/Weight:	27 Nos/820 Kg	
Pallet Dimensions in mm :	2320(L)*1130(W)*1275(H)	